


# Main Gear Drive isolated, nickel plated

Applies for series: ME9300, ME2000-37

|                      |         |
|----------------------|---------|
| Item number:         | 114983  |
| Product weight (kg): | 0.07 kg |
| Packing unit:        | 1       |




## PRODUCT DESCRIPTION

Applies for series: ME9300, ME2000-37

## TECHNICAL CHARACTERISTICS

|                                  |  |
|----------------------------------|--|
| <b>Type of setting:</b>          | Motor shaft isolated                       |
| <b>Material:</b>                 | Hardened steel                             |
| <b>Surface:</b>                  | Electroless nickel                         |
| <b>Isolated:</b>                 | yes  |
| <b>Feed Roll support:</b>        | insulated                                  |
| <b>Motor/gear distance (mm):</b> | 17   |
| <b>Driving pin type:</b>         | W/O  |
| <b>Specifics:</b>                | Suitable for insulating disc 8mm thickness |
| <b>Motor positions:</b>          | in the centre                              |

## DIMENSIONAL DRAWING

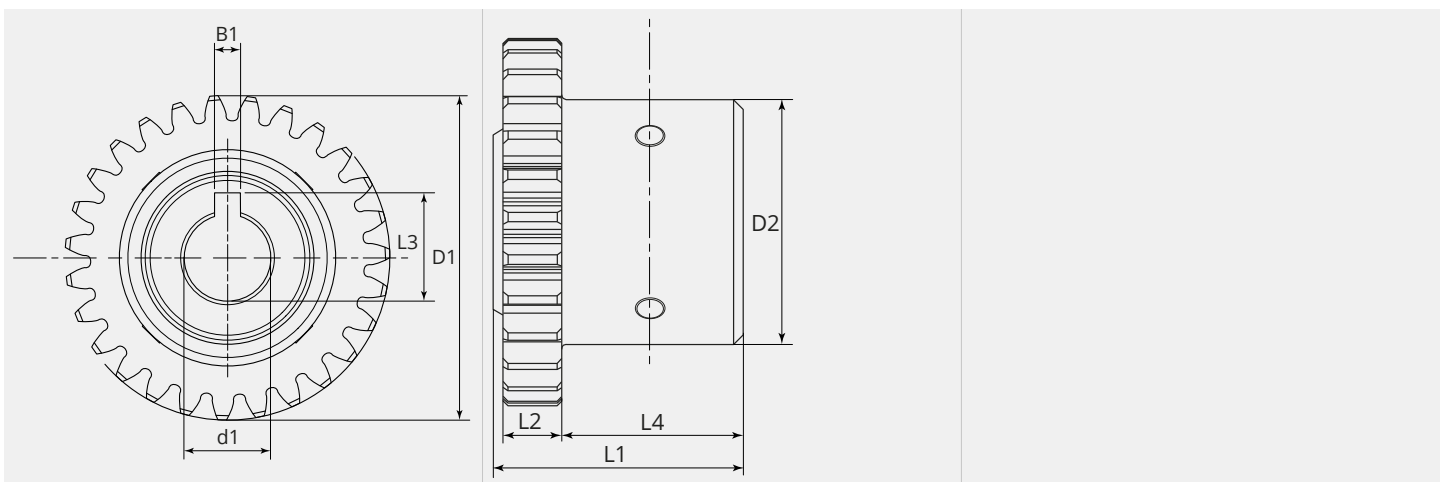



**DIMENSIONAL DRAWING**

|                 |       |
|-----------------|-------|
| <b>L1 (mm):</b> | 25.50 |
| <b>L2 (mm):</b> | 6.00  |
| <b>L3 (mm):</b> | 12.50 |
| <b>L4 (mm):</b> | 18.50 |
| <b>B1 (mm):</b> | 3.00  |
| <b>D1 (Ø):</b>  | 40.2  |
| <b>D3 (Ø):</b>  | 25.00 |
| <b>d1 (Ø):</b>  | 10.00 |